


ELECTRONIC CABINET LOCK USER MANUAL

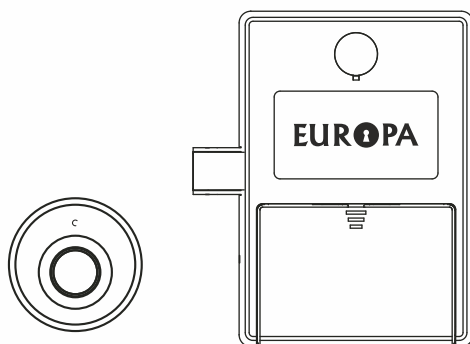


Feature

- Biometric sensors with high sensitivity
- Fingerprint capacity: 20
- E-key for emergency unlocking and management
- Usage Scenarios : drawer, cabinet, wardrobe etc.

EFE1811BLB1

How to Add New Fingerprints

- Place your any finger on the sensor. Wait for green light to turn ON and on third time when it blink then release your finger from sensor.
- Blue light will turn on & then start recording any fingerprints.
- Repeat placing your finger on sensor till blue light turns into green light. (Until green light stays ON for 2 seconds indicates fingerprint registered successfully)
- After registering First fingerprint, blue light turns ON again indicating to register additional fingerprint. If no additional fingerprint is added then wait until the lights stop blinking.

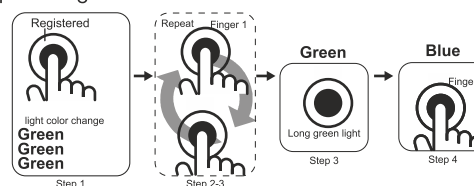


Note

- Make sure to add fingerprint before using, as lock will be in factory setting mode. Any fingerprint can be unlock in factory setting mode.
- Add at least 3 fingerprint for proper functioning.

How to Delete Fingerprints

Method 1

- Hold the registered finger on sensor until red light is blink.
- After that release your finger.
- Green light will blink for 2 seconds indicating that all the registered fingerprints are deleted.



1

Method 2

- Insert E-Key
- Place any fingerprint and wait for green light to turn into red.
- Green light will blink for 2 second indicating that all the registered fingerprints are deleted.



Other Functions

- **1. E-Key :** Insert E-Key, Put any finger on sensor, green light will glow which indicates lock is unlock/open




2. Low Battery Warning

- Insufficient power: Replace batteries when green & red light flashes frequently
- Battery type: 3 Nos. AAA alkaline batteries only (No normal battery)

3. Emergency Power


- Lock can be connected to a power bank or mobile charger for external power supply when power is low. Do replace batteries after unlocking.
- If fingerprint error or low battery occurs at the same time then insert the E-key or external source.

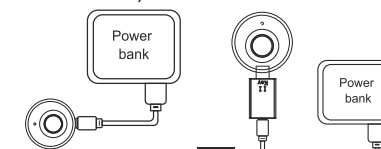

2


Installation Instructions

- Put the installation drawing on the door, approx. 45mm between the door frame and center hole (Picture 1), then drill the hole

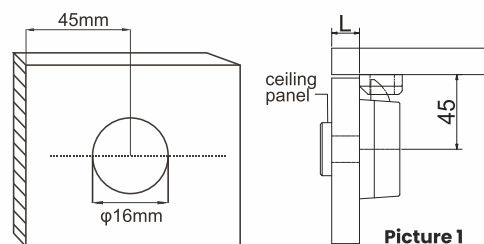

Picture 1


Wire Connection



Door Thickness (mm)	Screw
16mm~20mm	ST3*14


3

- Insert connecting wire (See picture 2) into the front panel, then wire goes through the centre hole; fix the panel by screw ST3*14MM.
- Insert connection wire (See Picture 2) into lock body, then fix up by screw ST3.5*18MM

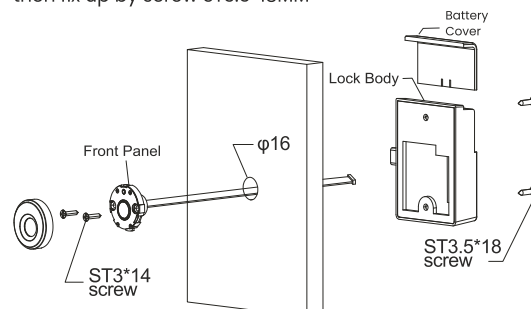

Picture 2


- Fix the striking plate by screw ST3.5X18 (Make sure latch works well)

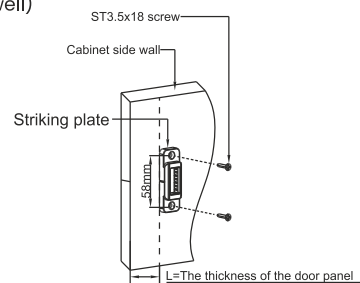


Picture 3

4

COMPONENT

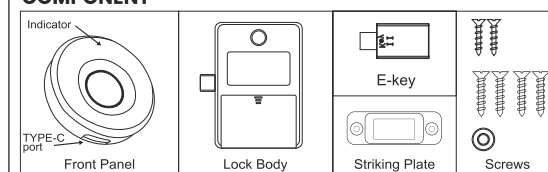

INSTALLATION DRAWING



Follow the drawing to drill the hole

5